



NEW POWER TOOLS RANGE

valid from 02/09/2024 to 28/02/2025





LET US INTRODUCE OUR RANGE, BETA POWER TOOLS, which comprises reliable, durable work instruments designed to satisfy every professional's requirements.



- BATTERY TOOLS
- CORDED TOOLS







WATCH THE VIDEOS AND FIND OUT MORE!

20V BATTERY-POWERED TOOLS

- 4 Impact drill
- 6 Reversible impact wrench, 600 Nm
- 8 Reversible impact wrench, 1200 Nm
- 10 Angle grinder
- 11 Construction site radio and bag
- 13 Batteries, chargers and starter kits

12V BATTERY-POWERED TOOLS

- 14 Reversible impact wrench
- 15 Impact drill
- 16 Batteries and chargers

CORDED TOOLS

- **19** Angle grinders
- 20 Impact drill
- 20 Hammer drill
- 21 Heat gun and glue gun
- 22 Vacuum cleaners

ACCESSORIES

- 24 Set of drills and cutters
- 27 Set of hole saws and cutters
- 28 Set of impact sockets
- 30 Set of bits

Index



The new range of battery tools includes 20V and 12V high-performance machines.

The 20V line comprises battery tools synonymous with:

High performance

, Construction quality

, Reliability

Durability

We at Beta relied on these hallmarks to develop a comprehensive line of battery tools, ranging from the high-torque impact drill to the impact wrench with ½" square drive. All of Beta's new power tools are equipped with brushless motors and first-rate interior mechanisms, for significantly improved performance and durability of the tool.

The impact wrench with a maximum unscrewing torque of 1200 Nm is no doubt the flagship power tool of the new range, an ideal work partner for anybody who needs unparalleled power and performance.

Our **20V lithium-ion batteries** are available with capacities up to 6Ah and can be used on all the tools of the range.





Scan the QR code for further information on free 3-year warranty extension!





IMPACT DRILL, BRUSHLESS, 80 Nm





3 OPERATING MODES:

- Drilling - Screwing - Impact drilling

13-mm auto-chuck

20-position torque adjustment

Selector switch, screwing/unscrewing locking modes (for transportation)

Built-in LED light

Ergonomic non-slip handle

Belt clip (right/left side)

Digital BRUSHLESS motor,

for significantly improved performance: increased power, reduced energy consumption, extended motor service life, improved power supply from button.

ADDITIONAL SIDE HANDLE,

for high-torque operation

Motor technology	Brushless
Max. torque	80 Nm
Chuck diameter	13 mm
Max. drilling diameter in wood	≥ 22 55 mm
Max. drilling diameter in metal	≥ 13 mm
Max. drilling diameter in masonry	==== 13 mm
Number of speeds	2
Free speed	0-450/1.650 rpm
	0 100/1.000 Ipili
Number of strokes	0-6.750/24.000
Number of strokes Weight (including battery)	•



1972/K20-410/SEL19-BITS = 019720015

20V kit of impact drill + 35 accessories

Composed of:

1972/K20V-13BMC

Impact drill, brushless, 20V, 80 Nm, 13-mm auto-chuck, dual speed. Supplied in a hard case complete with 2 4 Ah batteries and quick charger.

410/SEL19

Set of 19 HSS twist drills - Ø 1÷10 x 0.5 mm in cylinder selector.

862XP/A16

Set of 16 impact bits in pocket-size case.

○ PH2(x2)-PH3

○ PZ2(x2)-PZ3

○ T20-T25(x2)-T30(x2)-T40(x2)

O 4-5-6 mm



1972/K20-4AH+2AH = 019720022

20V kit of impact drill + 2 Ah battery

Composed of:

1972/K20V-13BMC

Impact drill, brushless, 20V, 80 Nm, 13-mm auto-chuck, dual speed. Supplied in a hard case complete with 2 4 Ah batteries and quick charger.



1994B 20V-2AH Included in price, additional 2 Ah battery



1972/20V-13BMC 3. 019720019

Impact drill, 20V, BRUSHLESS

(machine body)

Composed of:

1972/20V-13BMC

Impact drill, brushless, 20V, 80 Nm, 13-mm auto-chuck, dual speed.

Supplied in a hard case, without batteries and charger.





REVERSIBLE IMPACT WRENCH, **BRUSHLESS, 1/2" SQUARE DRIVE**





Gear case made entirely from metal

Tightening 3 torque settings and RPMs (low - medium - high):

1: 200 Nm; 1,000 RPMs

2: 350 Nm; 1,500 RPMs

3: 550 Nm; 1,800 RPMs

Untightening 1: 600 Nm: impact wrench applies maximum torque non-stop (free unscrewing)

2: 600 Nm - Autostop: impact wrench applies maximum torque until nut is fully unscrewed, and then stops automatically (single impact unscrewing)

Selector switch, screwing/unscrewing locking modes (for transportation)

Built-in LED light

Ergonomic non-slip handle

Belt clip (right/left side)

Digital BRUSHLESS motor,

for significantly improved performance: increased power, reduced energy consumption, extended motor service life, improved power supply from button.

Motor technology	Brushless
Max. tightening torque	550 Nm
Max. untightening torque	600 Nm
Torque adjustment range, min./max., level 1	0-200 Nm
Torque adjustment range, min./max., level 2	0-350 Nm
Torque adjustment range, min./max., level 3	0-550 Nm
Free speed	0-1.000/1.500/.1800 rpm
Number of strokes	0-2.300 strokes/min.
Weight (including battery) (kg)	2,9 kg









20V kit of 600 Nm impact wrench

- + Zero-Reset torque wrench
- + 3 impact sockets

Composed of:

1984/K600

Reversible impact wrench, brushless, 20V, 600Nm, 1/2" male square drive, 3 different torque settings in screwing mode. 2 in unscrewing mode.

Supplied in a hard case complete with 2 4 Ah batteries and quick charger.



Click-type torque wrench for right-hand tightening; torque accuracy: ±3%. Zero-Reset technology: wrench no longer requires releasing tension after use. Range of use: 40÷200 Nm, 1/2" square drive, 72-tooth push-through ratchet.

720LC/C3

3 impact sockets with coloured polymeric inserts, sizes 17 - 19 - 21 mm.



1984/K600-4AH+2AH = 019840022

20V kit of 600 Nm impact wrench + 2 Ah battery

Composed of:

1984/K600

Reversible impact wrench, brushless, 20V, 600 Nm, 1/2" male square drive, 3 different torque settings in screwing mode, 2 in unscrewing mode.

Supplied in a hard case complete with 2 4 Ah batteries and quick charger.





1984 20V/600BMC 3. 019840907

Reversible impact wrench, 20V, BRUSHLESS, with 1/2" drive - 600 Nm (machine body)

Composed of:

1984 20V/600BMC


Reversible impact wrench, brushless, 20V, 600 Nm, 1/2" male square drive, 3 different torque settings in screwing mode, 2 in unscrewing mode.

Supplied in a hard case, without batteries and charger.





REVERSIBLE IMPACT WRENCH,





Gear case made entirely from metal

Tightening 3 torque settings and RPMs (low - medium - high): 1: 350 Nm; 800 RPMs 2: 600 Nm; 1,400 RPMs 3: 900 Nm; 1,600 RPMs

Untightening 1: 1,200 Nm: impact wrench applies maximum torque non-stop (free unscrewing) 2: 1,200 Nm - Autostop: impact wrench applies maximum torque until nut is fully unscrewed, and then stops automatically (single impact unscrewing)

Selector switch, screwing/unscrewing locking modes (for transportation)

Built-in LED light

Ergonomic non-slip handle

Belt clip (right/left side)

Digital BRUSHLESS motor,

for significantly improved performance: increased power, reduced energy consumption, extended motor service life, improved power supply from button.

Motor technology	Brushless
Max. tightening torque	900 Nm
Max. untightening torque	1.200 Nm
Torque adjustment range, min./max., level 1	0-350 Nm
Torque adjustment range, min./max., level 2	0-600 Nm
Torque adjustment range, min./max., level 3	0-900 Nm
Free speed	0-800/1.400/1.600 rpm
Number of strokes	0-2.200 strokes/min.
Weight (including battery)	3,4 kg





20V kit of 1200 Nm impact wrench

- + Zero-Reset torque wrench
- + 3 impact sockets

Composed of:

1984/K1200

Reversible impact wrench, brushless, 20V, 1,200 Nm, 1/2" male square drive, 3 different torque settings in screwing mode. 2 in unscrewing mode.

Supplied in a hard case complete with 2 6 Ah batteries and quick charger.

666/20

Click-type torque wrench for right-hand tightening; torque accuracy: ±3%. Zero-Reset technology: wrench no longer requires releasing tension after use. Range of use: 40÷200 Nm, 1/2" square drive, 72-tooth push-through ratchet.

720LC/C3

3 impact sockets with coloured polymeric inserts, sizes 17 - 19 - 21 mm.



1984/K1200-6AH+4AH 3 019840032

20V kit of 1200 Nm impact wrench + 4 Ah battery

Composed of:

1984/K1200

Reversible impact wrench, brushless, 20V, 1,200 Nm, 1/2" male square drive, 3 different torque settings in screwing mode, 2 in unscrewing mode.

Supplied in a hard case complete with 2 6 Ah batteries and quick charger.





1984 20V/1200BMC 3. 019840911

Reversible impact wrench, 20V, BRUSHLESS, with 1/2" drive -1200 Nm (machine body)

Composed of:

1984 20V/1200BMC

Reversible impact wrench, brushless, 20V, 1200 Nm, 1/2" male square drive, 3 different torque settings in screwing mode, 2 in unscrewing mode.

Supplied in a hard case, without batteries and charger.









Air vents protected against dust infiltration and providing optimal cooling

> Additional handle, can be placed on both sides

Spindle lock device for quick disc changes

Diameter of disc (not included): 115/125 mm

Tool-less disc cover (quick release)

for significantly improved performance: increased power, reduced energy consumption, extended motor service life, improved power supply from button.

Motor technology	Brushless
Disc diameter	115/125 mm
Free speed	8.000 rpm
Switch	Sliding
Protection against accidental restart	Yes
Weight (including battery)	2,2 kg



20V kit of angle grinder + 2 Ah battery

Composed of:

1986/K20V-125

Angle grinder, brushless, 20V, with slide switch, disc diameter 115/125 mm, protection against accidental restart, tool-less disc cover, additional handle.

Supplied in a hard case complete with 2 4 Ah batteries and quick charger.

1994B 20V-2AH Included in price, additional 2 Ah battery



1986/20V-125BMC 3. 019860025

Angle grinder, 20V BRUSHLESS, (machine body)

Composed of:

1986/20V-125BMC

Angle grinder, brushless, 20V, with slide switch, disc diameter 115/125 mm, protection against accidental restart, tool-less disc cover, additional handle.

Supplied in a hard case, without batteries and charger.



1989RCB 4 019890020













Construction site radio, 20V

Multifunctional audio entertainment: digital (DAB; BT) and conventional FM radio

Suitable for use at construction sites or for leisure

Features:

- Sturdy radio with compact, modern, design, degree of protection IP54
- Powerful stereo sound provided by two powerful 16W side loudspeakers
- Built-in alarm function
- · Complete with carrying handle and shockproof corner protection
- With AUX connection and protected USB connector for phone connection and charge
- Can be used with Beta's 20V batteries (optional) or power supply cord (included).
- FM radio frequency range: 87.5 108 MHz
- DAB radio frequency range: 174 240 MHz
- Number of FM and DAB stored stations: 30
- Loudspeaker power: 16 W
- Rated voltage of battery (optional): 20 V
- Radio dimensions: 180 x 205 x 305 mm
- Radio weight (without battery): 3.2 kg







INCLUDED:





1984/K1200+TRA+SME+RA+4A = 019840034

20V kit of impact drill + impact wrench

- + grinder + construction site radio
- + 4 Ah battery

Composed of:

1972/K20V-13BMC

Impact drill, brushless, 20V, 80 Nm, 13-mm auto-chuck, dual speed. Supplied in a hard case complete with 2 4 Ah batteries and quick charger.

1984/K1200

Reversible impact wrench, 20V, 1200 Nm, 1/2" male square drive, 3 different torque settings in screwing mode, 2 in unscrewing mode. Supplied in a hard case complete with 2 6 Ah batteries and quick charger.

1986/20V-125BMC

Angle grinder, brushless, 20V, with slide switch, disc diameter 115/125 mm, protection against accidental restart, tool-less disc cover, additional handle. Supplied in a hard case, without batteries and charger, machine body only.

1989RCB

Construction site radio, 20V, with powerful 16W loudspeakers, degree of protection IP54. Digital (DAB; BT) and conventional (FM) radio, 30 storable stations. Can be used with Beta's 20V batteries (optional) or power supply cord (included).



C9PT 3. 021090001

Technical fabric bag for battery tools

- · Perfect for conveniently carrying Beta's power tools
- Made from super durable technical fabric
- Dual top handle for a safe, balanced hold







LITHIUM-ION BATTERY FOR TOOLS, 20V



Premium Lithium-Ion technology

With button and 3 coloured LED charge level indicators

1994B 20V-2AH

3. 019940022

- · Battery voltage: 20V
- · Battery capacity: 2 Ah
- . Energy capacity: 40 Wh
- Battery type: Li-ion



■ 1994B 20V-4AH

= 019940044

- · Battery voltage: 20V
- Battery capacity: 4 Ah
- . Energy capacity: 80 Wh
- Battery type: Li-ion



1994B 20V-6AH

-- 019940066

- Battery voltage: 20V
- Battery capacity: 6 Ah
- . Energy capacity: 120 Wh
- Battery type: Li-ion

6 Ah



1994C 20V 3. 019940140

Quick battery charger, 20V, 110V-240V

Main features:

- LED charge level indicator
- Rated input voltage: 110V-240V ~ 50/60Hz
- Output voltage: 20V
- Charging current: 6A
- Rated input power: 145W





2 Ah: 45 min 4 Ah: 90 min 6 Ah: 120 min

3. 019940246

1994BC-4AH/SK-BORSA

3. 019940244

4 Ah starter kit

Composed of:

1994B 20V-4AH

2 4 Ah lithium ion batteries for 20V tools. Complete with button and 3 coloured LED charge level indicators.

1994C 20V

Quick battery charger, 20V, 110V-240V, with LED charge level indicator.



C9PT Included in price, technical fabric bag

1994BC-6AH/SK-BORSA 6 Ah starter kit

Composed of:

1994B 20V-6AH

2 6 Ah lithium ion batteries for 20V tools. Complete with button and 3 coloured LED charge level indicators.

1994C 20V

Quick battery charger, 20V, 110V-240V, with LED charge level indicator.









BATTERY TOOLS 12V

The 12V line includes the impact drill and the impact wrench with bit chuck, must-have tools designed to make everyday work easier, based on performance, lightweightness and compactness.



1/4" hexagon drive with locknut

Gear case made entirely from metal

Belt clip (right/left side)

Charge indicator on impact wrench body

Selector switch, screwing/unscrewing **locking modes** (for transportation)

Built-in LED light

Ergonomic non-slip handle

Max. torque	80 Nm
Free speed	0-2500 rpm
Number of strokes	0-3.500 strokes/min.
Hexagon insert	1/4"
Weight (including battery)	1 kg



Reversible impact wrench 12V kit

Composed of:

1982/K12V

Reversible impact wrench 12V.

Supplied in a hard case with 2 Lithium-Ion batteries 2 Ah and quick charger.



1982/12V 3. 019820113

Reversible impact wrench, 12V

(machine body)

Composed of:

1982/12V

Reversible impact wrench 12V.

Supplied in a hard case. without batteries and charger.







1972/K12-410/SEL19-BITS = 019720115

12V kit of ultracompact drill + 35 accessories

Composed of:

1972/K12V-10

Ultracompact drill, 12V, 30 Nm, 10-mm auto-chuck, dual speed. Supplied in a hard case complete with 2 2 Ah batteries and quick charger.

410/SEL19

Set of 19 HSS twist drills - Ø 1÷10 x 0.5 mm in cylinder selector.

862XP/A16

Set of 16 impact bits in pocket-size case.

◆ PH2(x2)-PH3

• PZ2(x2)-PZ3

• T20-T25(x2)-T30(x2)-T40(x2)

O 4-5-6 mm





1972/K12V-10 = 019720112

Ultracompact drill 12V kit

Composed of:

1972/K12V-10

Ultracompact drill, 12V, 30 Nm, 10-mm auto-chuck, dual speed.

Supplied in a hard case complete with 2 2 Ah batteries and quick charger.



1972/12V-10 = 019720113

Ultracompact drill, 12V

(machine body)

Composed of:

1972/12V-10

Ultracompact drill, 12V, 30 Nm, 10-mm auto-chuck, dual speed.

Supplied in a hard case, without batteries and charger.



1972/K12V-COMBO = 019720010

12V kit of ultracompact drill

+ 1/4" HEX reversible impact wrench

Composed of:

- 1 12V ultracompact drill, with 10-mm autochuck
- 1 12V reversible impact wrench. with 1/4" hexagon drive
- 2 2 Ah Lithium-Ion batteries
- 1 quick battery charger



2 Ah lithium ion battery for tools, 12V

Main features:

- · Battery voltage: 12V
- . Battery capacity: 2 Ah
- Energy capacity: 24 Wh
- Battery type: Li-ion



Quick battery charger, 12V, 110V-240V

Main features:

- LED charge level indicator
- Rated input voltage: 110V-240V ~ 50/60Hz
- Output voltage: 12.6V
- Charging current: 2A
- Rated input power: 35W
- 2 Ah battery charging time: 50 min









CORDED TOOLS

The range of corded tools comprises of angle grinders, (impact and hammer) drills, solid and fluid vacuum cleaners, heat and hot glue guns.

In particular, **Beta's angle grinders** (with powers of 750W to 2400W) are proving increasingly successful based on the following construction characteristics:

Outstanding performance

- Powerful, resin-bonded, wear-resistant, durable motor
- Air vents providing optimal cooling, protected against dust infiltration

Unparalleled safety for operators:

- Spindle lock device for quick disc changes
- Protection against accidental activation
- Smooth start, for limiting large initial inrush of current on start-up

Unique comfort and ease of handling:

- Non-slip ergonomic handle for improved grip
- Lowered head that allows working in confined spaces


Tangle-free cable no less than 4 metres in length for increased ease of movement

Additional handle that can be mounted on both sides.







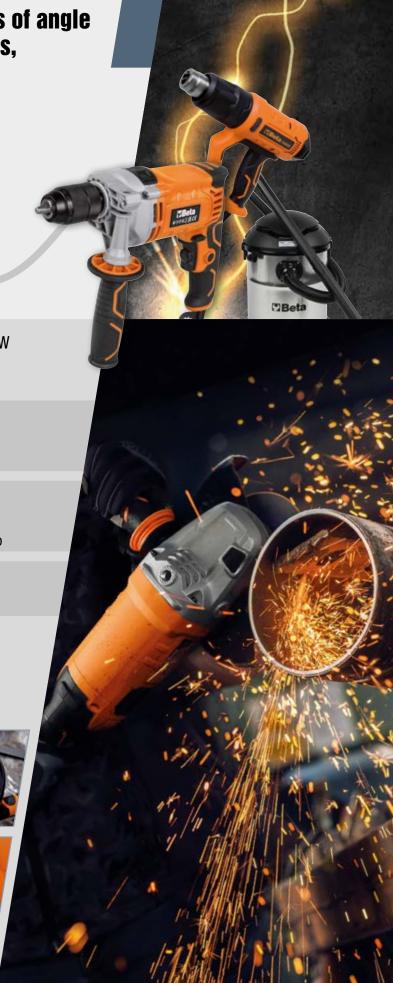



4 m

1956 115-750W 3. 019560011





Angle grinder for discs Ø 115 mm

Ideal for cutting, grinding and roughing jobs

Powerful motor (750 W)

- Protection against accidental activation
- Additional handle that can be mounted on both sides
- Tool-less disc cover (quick release)
- · Lock-on/off slide switch
- · Service wrench included

1956 125-1400W 3 019560125





Angle grinder for discs Ø 125 mm

Ideal for cutting, grinding and roughing jobs

Powerful motor (1400 W) - Variable speed

- Protection against accidental activation
- · Additional anti-vibration handle that can be mounted on both sides
- Tool-less disc cover (quick release)
- Spindle lock device for quick disc changes
- Lock-on/off slide switch
- · Service wrench included





Ideal for complex shearing, grinding and filing jobs

Powerful motor (2400 W)

- Protection against accidental activation
- Soft-start function for a smooth start and limiting large initial inrush of current on start-up
- · Additional anti-vibration handle that can be mounted on both sides
- · Screw disc cover
- Lock-on/off slide switch
- · Service wrench included



VARIABLE SPEED

	1956 115-750W	1956 125-1400W	1956 230-2400W
Absorbed power	750 W	1400 W	2400 W
Voltage	220-240 V / 50 Hz	220-240 V / 50 Hz	220-240 V / 50 Hz
Disc diameter (disc not included)	115 mm	125/115 mm	230 mm
Free speed	11.000 rpm	3.000 - 10.000 rpm	6.500 rpm
Tool spindle thread	M14	M14	M14
Tangle-free cable length	4 m	4 m	4 m
Weight	1,8 kg	2,5 kg	5,8 kg



1966/910W 3 019660091



Impact drill, 910W

Ideal for drilling in different materials, including wood, metal, plastic, masonry and concrete

Powerful 910W motor

Linear, compact design with ergonomic, non-slip handle

- Metal auto-chuck, 13 mm
- Reversible variable speed
- Gear case made entirely from metal
- · Switch lock for improved comfort of use

Supplied accessories:

- Metal auto-chuck, 13 mm
- Additional side handle that can be rotated 360°
- Depth rod

Max. drilling diameter in wood:	⋙ 32 mm
Max. drilling diameter in metal	= 13 mm
Max. drilling diameter in masonry	=== 13 mm
No-load speed	0-2800 rpm
Tangle-free power supply cord length	4 m
Weight	4,3 kg



1967/800W 3. 019670080





SDS-PLUS hammer drill, 800W

Professional, lightweight and powerful (800W); ideal for drilling, hammering and chiselling in masonry, concrete, tiles, wood and metal.

Ergonomic, compact design, for working in small/confined spaces.

Features:

- 3 operating modes + Vario-Lock function:
 - Drill function
 - Hammer function
 - Chisel function
- Vario-lock function can be locked in 36 chiselling positions, to obtain an optimal work angle
- Reversible
- · Safety clutch

Supplied accessories:

- 13-mm chuck with SDS-PLUS adapter
- Additional side handle that can be rotated 360°
- Depth rod
- 3 masonry drill bits, Ø 8-10-12 mm, length 150 mm
- 1 flat chisel, 14x250 mm
- 1 point chisel, 14x250 mm

Max. drilling diameter in wood	≥ 22 30 mm
Max. drilling diameter in metal	≥ 13 mm
Max. drilling diameter in concrete	26 mm
No-load speed	0-1350 rpm
Number of strokes	0-5700 strokes/min
Stroke powe	3,2J
Tangle-free power supply cord length	4 m
Weight	5,2 kg

















3-speed heat gun

Functions:

- Heat shrinking
- Stripping paint, softening PVC parts
- Soldering, welding
- Shrinking cables
- Thawing, drying, disinfecting
- · Treating glued parts
- 4 nozzles included

Features:

- Pos. I 250 I/min 50 °C
- Pos. II 250 I/min 400 °C
- Pos. III 500 I/min 550 °C













Adjustable electronic heat gun

Functions:

- · Heat shrinking
- Stripping paint, softening PVC parts
- Soldering, welding
- Shrinking cables
- . Thawing, drying, disinfecting
- Treating glued parts
- 4 nozzles included

Features:

- · Digital display
- Temperature and flow rate adjustment buttons
- Pos. I 250-500 I/min 50 °C
- Pos. II 250-500 I/min 50-650 °C
- 4 preset programmes and other customizable programmes:
 - Prog 1 150 °C ca. 400 l/min
 - Prog 2 200 °C ca. 400 l/min
 - Prog 3 300 °C ca. 450 l/min

- Prog 4 400 °C ca. 500 I/min















Hot glue gun with 12 thermofusible glue sticks

in case


- Power: 80 W
- For stick glue, ø 11 mm and 12 mm







	1870	1870I	1872L 35	1873 30	1874 50
BY-PASS MOTOR	single-stage	single-stage	two-stage	two-stage	two-stage
VOLTAGE	220/240 V	220/240 V	220/240 V	220/240 V	220/240 V
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
MAX. POWER	1200 W	1200 W	1100 W	1100 W	1350 W
AIRFLOW RATE	58 l/sec.	58 l/sec.	55 l/sec.	55 l/sec.	55 l/sec.
MAX. SUCTION PRESSURE	190 mbar	190 mbar	220 mbar	220 mbar	240 mbar
MAX. DRUM CAPACITY	20 I made of antistatic PP	20 I made of stainless steel	35 I made of antistatic PE-HD	30 I made of stainless steel	50 I made of stainless steel
ACOUSTIC EMISSIONS	<70 dB(A)	<70 dB(A)	<70 dB(A)	<61 dB(A	<63 dB(A)
CABLE LENGTH	5 m	5 m	6 m	6 m	6 m

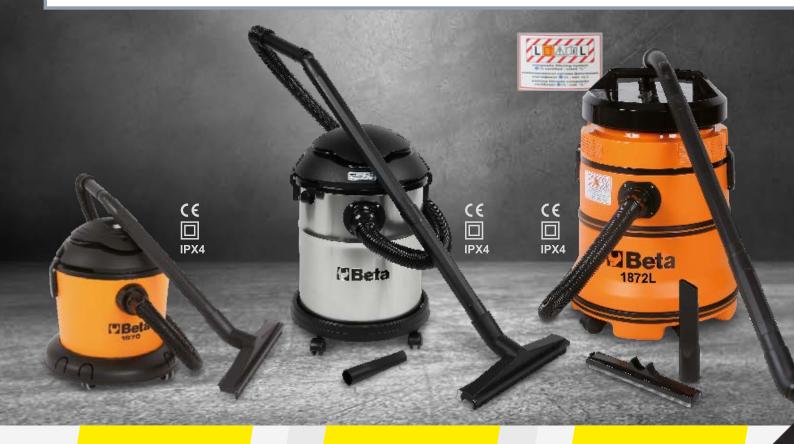

1870 3 018700020

Solid and fluid vacuum cleaner, 20 l

• Trolley for accessories

STANDARD ACCESSORIES, Ø 36 mm

- 1 corrugated hose with ergonomic handle
- 2 hard extension tubes
- 1 multiuse brush for floors and fluids
- 1 flat nozzle

FILTERING SYSTEMS

- 1 surface air filter cartridge 1900 cm² - 12 μm nom.
- 1 anti-foam filter PPI 45/PPI 30

1870 3 018700220

Solid and fluid vacuum cleaner, 20 I, stainless steel drum

STANDARD ACCESSORIES Ø 36 mm:

- 1 corrugated hose with ergonomic handle and vent
- 2 hard extension tubes
- 1 multiuse brush for floors and fluids
- 1 flat nozzle
- 1 paper bag

FILTERING SYSTEMS

- 1 surface air filter cartridge
- 1900 cm² 12 μm nom. 1 anti-foam filter PPI 45/PPI 30

1872L 35 🕮 018720135

Solid and fluid vacuum cleaner, 35 I "L" class certified

STANDARD ACCESSORIES Ø 36 mm:

- 1 corrugated hose with ergonomic handle
- 2 plastic extension tubes
- 1 combined brush frame
- 1 section with fluid collection hoses
- 1 flat nozzle

FILTERING SYSTEMS

- 1 disposable fabric bag; filtration class: "L"
- 1 filter cartridge; IFA class: "L"
- 1 anti-foam filter PPI 45/PPI 30
- · 2 post-filters made of PP-laminated PET





Solid and vacuum cleaner, 30 I, stainless steel drum

• Trolley for accessories

- **STANDARD ACCESSORIES Ø 45 mm** 1 corrugated hose with ergonomic handle
- 2 stainless steel extension tubes
- 1 industrial brush frame
- 1 industrial section for carpets
- 1 industrial section with fluid collection hoses
- 1 flat nozzle

FILTERING SYSTEMS

- 1 filter paper bag
- 1 surface filter cartridge 1900 cm², 12 µm nom.
- 1 anti-foam filter PPI 45/PPI 30

1874 50 🕮 018740050

Solid and fluid vacuum cleaner, 50 l, stainless steel drum

Trolley for accessories

STANDARD ACCESSORIES Ø 45 mm

- 1 corrugated hose with ergonomic handle
- 2 stainless steel extension tubes
- 1 industrial brush frame
- 1 industrial section for carpets
- 1 industrial section with fluid collection hoses
- 1 flat nozzle

FILTERING SYSTEMS

- 1 filter paper bag
- 1 surface filter cartridge 5200 cm2, 12 µm nom.
- 1 anti-foam filter PPI 45/PPI 30

ACCESSORIES

Beta's power tools can be used with numerous accessories, which share the same functionality and quality standard as all the hand tools of our range.

These accessories satisfy every user's requirements, while allowing Beta's Power Tools catalogue to stand out as even more comprehensive:

- **drill bits** made from several different materials, specific for metal, masonry or wood;
- holes saws and cutters as well as bits varying in type, for use with impact drills:
- impact sockets for hexagon, bi-hex, XZN® and Torx® head screws. for use with impact wrenches.



410MIX/SEL19 = 004100417

Set of 13 twist drills, item 410, and 6 twist drills with hard metal insets

Ø 1-1,5-2-2,5-3-3,5-4-4,5-5-5,5-6-8-10 mm

CZZZZ

Ø 4-5-6-8-9-10 mm



410/SEL19 = 004100418

Set of 19 twist drills with cylindrical shanks (item 410)

- HSS
- Short series
- $R \le 650 \text{ N/mm}^2$
- HV ~ 750÷820
- DIN 338

Ø 1÷10 x 0,5 mm



410/SP25 = 004100425

Set of 25 twist drills with cylindrical shanks (item 410) in case

- HSS
- Short series
- $R \le 650 \text{ N/mm}^2$
- HV ~ 750÷820
- DIN 338

Ø 1÷13 x 0,5 mm



412/SP25

Set of 25 twist drills with cylindrical shanks (item 412) in case

- HSS
- Short series
- Glossy finishing
- $R \le 800 \text{ N/mm}^2$
- HV ~ 750÷820
- DIN 338

Ø 1÷13 x 0,5 mm







with cylindrical shanks, **HSS-CO 5%**

- HSS-C0 5%
- Short series
- R ≤ 1200 N/mm²
- $\bullet~HV~\sim~800 \div 860$
- · For drilling into stainless steel, alloy steel, cast iron, mild steel, light alloys

Ø 1÷10 x 0,5 mm



415/SP25 = 004150425

Set of 25 twist drills with cylindrical shanks (item 415) in case

- HSS-CO 8%
- Short series
- R ≤ 1400 N/mm²
- HV ~ 850÷920
- DIN 338

Ø 1÷13 x 0,5 mm



414/SP25 = 004140425

Set of 25 twist drills with cylindrical shanks (item 414) in case

- HSS-TiN
- Short series
- HSS-TiN entirely ground
- R ≤ 900 N/mm²
- HV 0,05 ~ 2500
- DIN 338

Ø 1÷13 x 0,5 mm



425/SP3 3 004250030

Set of 3 stepped drills (item 425) in case

HSS

Ø 4÷12; 4÷20; 4÷30 mm



426/SP6 3. 004260030

Set of 6 countersinking cutters with three cutters (item 426) in case

- HSS
- For making cone-shaped screw seats
- CBN cutters
- DIN 335-C

GR 3-5-7-8-10-11 Ø 6,3÷20,5 mm



426MD/SP10 = 004260510

Set of 10 rotary files, for steel (including stainless steel)





418/K3 = 004180103

Kit of 3 masonry chisels with SDS-plus connection

Kit contents:



417/SP8 = 004170100

Set of 8 helical cylindrical masonry drill bits (item 417) in case

- Made from milled steel
- · Short series
- · Hard metal plates

Ø 3-4-5-6-8-9-10-12 mm



419/SP7 = 004190507

Set of 7 hammer drill bits with milled shanks and hard metal plates SDS Plus tang

- HVA ~ 1650
- 2 cutters
- 4 spirals
- For drilling into walls, cement, concrete, stones

Ø 5-6-8 x 110 mm Ø 6-8-10-12 x 160 mm



420D/SP8 = 004200200

Set of 8 twist drills with cylindrical shanks, for wood, short series, 2 cutters, centre guide drill bits

Ø 3-4-5-6-7-8-9-10 mm







450/C13 3 004500310

Assortment of 13 holesaws and accessories for installers



	450	Ø 19-22-29-35-38 44-51-57- 64 mm
	450AL	/1 - /2
00-00-00-00-00-00-00-00-00-00-00-00-00-	450PA/1	
-	450AD	

== 215x180x65 mm

450/C15 3. 004500313

Assortment of 15 holesaws and accessories for electricians, in metal case



	450	Ø 16-20-25-32-40 51-60-65-70 mm
+	450AL	/1 - /2
00-00-00-00-00-00-00-00-00-00-00-00-00-	450PA	/1 - /2
	450PR	
-	450AD	

₩ 420x185x60 mm

450/C21 3. 004500315

Assortment of 21 holesaws and accessories for industrial use, in metal case





	450	Ø 19-22-29-35-38- 44- 51-57-64-76-83- 92-95-105-114 mm
+	450AL	/1 - /2
0.00	450PA	/1 - /2
	450PR	
•	450AD	

₩ 420x280x60 mm

451/C8 3. 004510308

Assortment of 8 hole cutters, **HSS**, entirely ground

• Minimum thickness: 4 mm





Ø 16-18-20-22-25-30-32-35 mm

₹ 270x225x70 mm





Set of 6 impact sockets, in metal case



© 13-14-17-19-22-24 mm

─ 195x80x55 mm



720/C12 3. 007200912

Set of 12 impact sockets, in metal case



O 10-11-12-13-14-17 19-22-24-27-30-32 mm



720B/C12 3. 007201912

Set of 12 bi-hex impact sockets, phosphated, in metal case



O 10-11-12-13-14-17 19-22-24-27-30-32 mm



720/C24 3 007200904

Set of 24 impact sockets, 1/2" female drive, phosphatized, in metal case



0	720	10-12-13-14-15-16-17-18- 19-21-22-24-27-30-32 mm
0	720L	13-17-19-21-22-24 mm
0	720LC	17-19-21 mm

₹ 420x185x60 mm





720LC/C3 __ 007200653

Set of 3 impact sockets for wheel nuts, with polymeric inserts,

in plastic case



720LCL/C3 3. 007200753

Set of 3 impact sockets for wheel nuts, long series, coloured, with polymeric inserts, in plastic case



720ME/C8 3. 007200525

Set 8 impact socket drivers for hexagon screws



O 5-6-8-10-12-14-17-19 mm



720XZN/C6 3. 007201530

Set of 6 impact socket drivers for XZN® head screws, phosphated, in metal case



O M8-M10-M12-M14-M16-M18

₹ 275x120x65 mm



Set of 6 impact socket drivers for Torx® head screws, in metal case







O T30-T40-T45-T50-T55-T60

== 275x120x65 mm



Set of 16 impact bits in pocket-size case





- ◆ PH2(x2)-PH3
- PZ2(x2)-PZ3T20-T25(x2)-T30(x2)-T40(x2)
- O 4-5-6 mm



862F/A7 3. 008620950

Set of 7 magnetic bits, hexagon sockets, in plastic case





© 5,5-6-7-8-10-12-13 mm



860MIX/A31 3. 008600902

Set of 30 bits with magnetic bit holder in plastic case





	0	860LP	0,5x3 - 0,6x4,5 - 0,8x5,5 1,0x5,5 - 1,2x6,5 mm
-	0	860PE	2 - 2,5 - 3 - 4 - 5 - 6 8 - 10 mm
	0	860PH	PH0 - PH1 - PH2 - PH3 - PH4
9	0	860PZ	PZ1 - PZ2 - PZ3 - PZ4
	0	860RTX	T9 - T10 - T15 - T20 T25 - T27 - T30 - T40
223		882MSR 50	○ 1/4 - ● 1/4

BW 860EA/31 = 008606992

Set of 30 bits with magnetic bit holder, in plastic case




	•	BW 861LP	0,5x3-0,6x4,5-0,8x5,5-1,0x5,5- 1,2x6,5-1,6x8 mm
E	0	BW 861PH	PH1-PH2-3
	0	BW 861PZ	PZ1-PZ2-PZ3
	0	BW 861PE	2-3-4-5-6-8 mm
	0	BW 861TX	T8-T9-T10-T15-T20-T25-T27-T30-T40
	0	BW 861PQ	1-2-3 mm
		BW 882M1	○ 1/4 - ● 1/4

BW 861/C61 = 008616961

Set of 60 bits with magnetic bit holder, in plastic case



	•	BW 861LP	0,5x3 (2)-0,5x4(2)-0,6x4,5(2)-0,8x5(2)- 1,0x5,5(2)-1,0x6(2)-1,6x8(2) mm
=	0	BW 861PH PH0(2)-PH1(7)-PH2(7)-PH3(2)	
	0	BW 861PZ	PZ0(2)-PZ1(3)-PZ2(3)-PZ3(2)
	0	BW 861PE	1,5-2-2,5-3-4-4,5-5-5,5-6-8 mm
	0	BW 861TX T9-T10-T15-T20-T25 T27-T30-T40	
		BW 882M1	○ 1/4 - ● 1/4

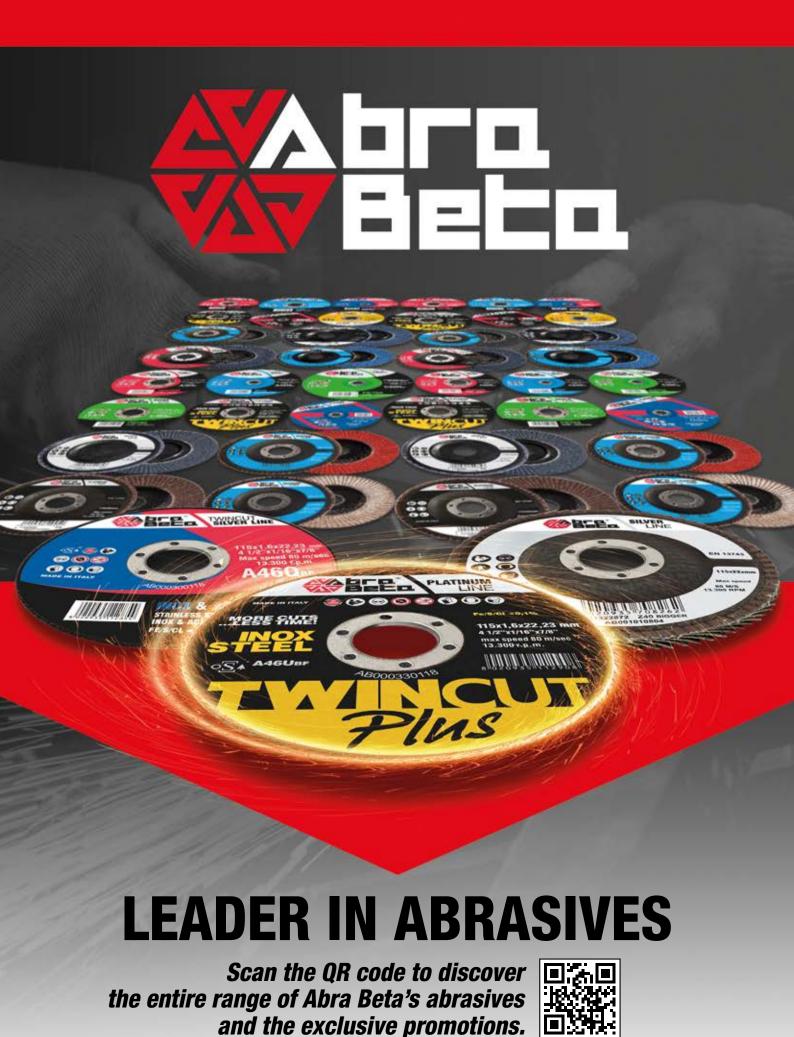

it Beta

